


Product Description

Constant Voltage 24V 4.17 AMP 100 Watt.
 5 in 1 Dimming: TRIAC/0-10V/1-10V/10V PWM/ Resistance
 Dimming Range 0-100%,
 Dimming Depth: Max 1%.
 Flicker-free IEEE 1789 high frequency exemption.
 Cooling by free air convection.



Wiring Diagram

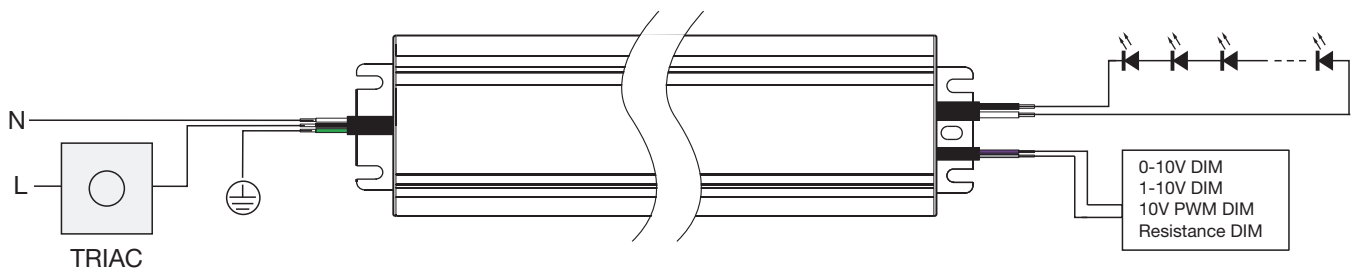

Product Features

- UL Listed Class P Power Supply
- Efficiency 91%
- 5 in 1 Dimming
- Overload/Over temp/ Shortcircuit/protection
- Auto recover
- IP67

Specifications


Output Voltage	24V DC
Power	100 Watt
Case dimensions	9.76 x 1.85 x 0.80 L X W X H
AC input	40-inch power cord w/3-prong plug
DC output	9-inch insulated bare wire

Product Description

Constant Voltage 24V 12.5 AMP 300 Watts.
 5 in 1 Dimming: TRIAC/0-10V/1-10V/10V PWM/ Resistance
 Dimming Range 0-100%,
 dimming Depth: Max 1%.
 Flicker-free IEEE 1789 high frequency exemption.
 Cooling by free air convection.



Wiring Diagram

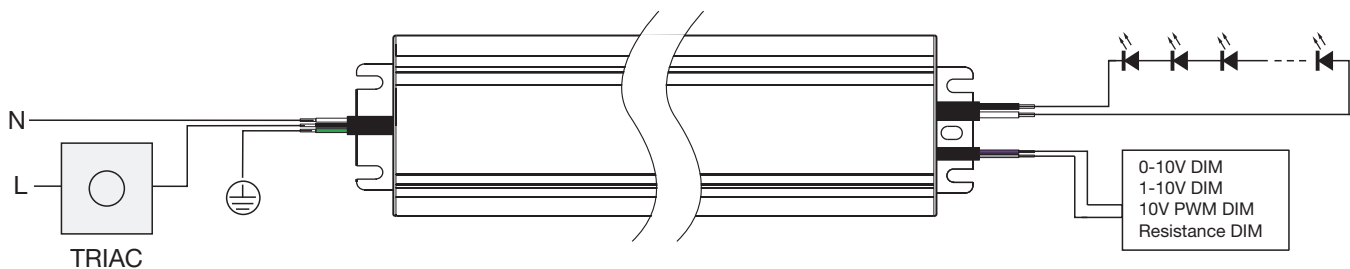

Product Features

- UL Listed Class P Power Supply
- Efficiency 91%
- 5 in 1 Dimming
- Overload/Over temp/ Shortcircuit/protection
- Auto recover
- IP67

Specifications

Output Voltage	24V DC
Power	300 Watt
Case dimensions	10.74 X 2.91 X 0.92 L X W X H
AC input	40-inch power cord w/3-prong plug
DC output	9-inch insulated bare wire