



Product Description

LED Flexible Strip Tape



X-EXTEND SERIES: Normal Brightness Range

Enhanced for continuous long-distance length lighting. Designed to reduce cut points and power demand applications for crown-molding, cove or soffit lighting and long corridors.

- Waterproof version available: (X-24NB301.5IP67*) *IP67 Rated (Encased) LED tape light in fully sealed matte finish, flexible silicone extrusion. Indoor or outdoor rated for moisture and high humidity environments (not submersible). Requires separate adhesives to permanently bond to substrates (not included).

Specifications

Input Voltage	24 VDC
Power	1.5W/FT
CRI (Ra)	90+
Lumen	110-130LM/FT
Beam Angle	120 Degree
Max Cont. Run Length	80FT
Reel Length	40FT



3000K


Model Number Code

X- 24 NB 30 1.5

Series Voltage Brightness Color Temp Watts

Part Number xx 2-Digit CCT Code:
30-3000k

Dimensions

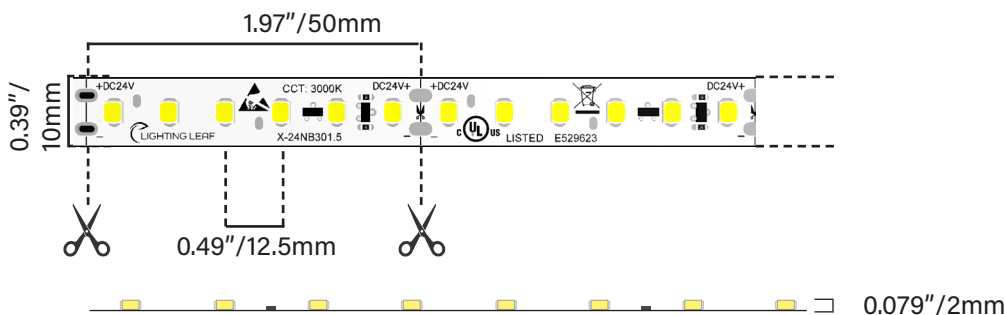



IP20 & IP67 Water Ratings

Model	X-24NB301.5	X-24NB301.5 IP67
Environment	IP20	IP67

- All other specifications match between IP20 & IP67 models




3000K

Normal Brightness 3000K
X-24NB301.5IP67
with IP67 WATER RATING






WP67-T-T2P * WP67-T-W2P *

* IP67 Waterproof Connectors:
Outdoor rated for moisture,
not fully submersible.

Recommended Connectors



Connector Specifications

T-T2P	Tape to Tape 2PIN Connector
T-W2P	Tape to Wire 2PIN Connector
ST-T-W2P	Screw Terminal Tape to Wire 2PIN Connector
HDT-W2P	High Density Tape to Wire 2PIN Connector
HDT-T2P	High Density Tape to Tape 2PIN Connector
WP67-T-T2P	IP67 Tape to Tape 2PIN Connector*
WP67-T-W2P	IP67 Tape to Wire 2PIN Connector*



All Lighting Leaf LED Strip Tapes have been evaluated by UL to meet the following standards:

Standard(s) for Safety:

UL 2108 - Low Voltage Lighting Systems

CSA-C22.2 No. 250.2 - Lighting Systems

See below for further scope information.



1 Scope

1.1 These requirements apply to low voltage lighting systems and components intended for installation in accordance with the National Electrical Code, NFPA 70, Article 411.

1.2 These requirements cover:

a) Power units in which output is limited to 25 A and below the risk of electric shock voltage levels as defined in 19; and
b) Class 2, exposed bare conductor, POE, and other low-voltage luminaires and lighting systems.

1.3 These requirements do not cover lighting equipment covered by other standards such as, but not limited to, the Standard for Portable Electric Luminaires, UL 153, the Standard for Track Lighting Systems, UL 1574, or the Standard for Luminaires, UL 1598:

a) Luminaires provided with a cord and attachment plug intended for branch circuit connection. See the Standard for Portable Electric Luminaires, UL 153.
b) Luminaires intended to be mounted to and relocatable along a track, including when the track is supplied at low voltage. See the Standard for Track Lighting Systems, UL 1574.

c) Luminaires intended to be carried by hand or exclusively used not connected to a branch circuit. See the Standard for Flashlights and Lanterns, UL 1576.

d) Luminaires integrated with a power unit in a singular product. See the Standard for Luminaires, UL 1598.

1.4 Light emitting diode (LED) components, controls, and subassemblies integral to a low voltage lighting system shall comply with the applicable requirements of the Standard for Light Emitting Diode (LED) Equipment for Use in Lighting Products, UL 8750.

1.5 These requirements do not address certain specialized applications, including but not limited to hazardous/classified locations, emergency lighting, marine (ship-board) lighting, horticultural systems, germicidal luminaires, air-handling luminaires, or luminaires installed over cooking equipment. Low voltage lighting system equipment intended for such applications are to be investigated in accordance with standards written for the purpose.